

## Edge of Arlington Saw & Tool, Inc.

124 South Collins  
Arlington, TX 76010  
Phone: 817-461-7171 • Fax: 817-795-6651  
Toll Free: 888-461-7171  
Email: [info@eoasaw.com](mailto:info@eoasaw.com)  
Website: [www.eoasaw.com](http://www.eoasaw.com)



### Item #46352-K, Amana Tool CNC Solid Carbide Spektra™ Extreme Tool Life Coated Mortise Compression Spiral 3/8" Dia x 1 1/4" x 1/2" Shank 2-Flute

**\$121.31**

Thank you for shopping with us!


These tools have a much shorter upcut section than the standard compression tools. They are ideal for mortising, grooving, and dado.

Excellent for cutting: MDF/HDF, Laminate, Melamine, Plywood, Wood. Recommended RPM 20,000-21,000.

Our Spektra™ bits feature a nACo® nanocomposite coating with an extreme nanohardness and heat resistance. With a brilliant distinctively-tinted coloring, nACo® provides additional improvements in four critical aspects of router tooling:

- nACo® coating is a micro-thin ceramic coating that enables the tool's cutting edge to retain crucial sharpness and lubricity. This provides longevity and produces cutting results of the highest quality.
- Coating prevents high heat and oxidation, which is detrimental to cutting tool performance.
- Multi-colored hues, while attractive, will dissipate upon use and yet coating will remain fully effective.
- nACo® offers approximately 4,500 Vickers for impressive solid hardness on cutting areas of the tool, for an increase up to 2.5 times compared to uncoated bits.

Note: Blue based color dissipates immediately upon use. nACo® nanocomposite coating will not wear off.

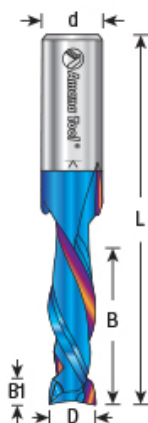

## SPECIFICATIONS

|                                     |                         |
|-------------------------------------|-------------------------|
| <b>Manufacturer</b>                 | Amana Tool              |
| <b>Diameter</b>                     | 3/8 in                  |
| <b>Flute</b>                        | 2                       |
| <b>Cut Height, Length, or Width</b> | 1 1/4 in                |
| <b>Overall Length</b>               | 3 in                    |
| <b>Pack Quantity</b>                | 1                       |
| <b>Shank</b>                        | 1/2 in                  |
| <b>RPM</b>                          | Max RPM 20,000 - 21,000 |