

## Edge of Arlington Saw & Tool, Inc.

124 South Collins  
Arlington, TX 76010  
Phone: 817-461-7171 • Fax: 817-795-6651  
Toll Free: 888-461-7171  
Email: [info@eoasaw.com](mailto:info@eoasaw.com)  
Website: [www.eoasaw.com](http://www.eoasaw.com)



### Item #51525, Amana Tool Solid Carbide CNC Spiral for Glass Reinforced Plastic Cutting 1/4 x 3/4 x 1/4 Shank Upcut ZrN Coated Router Bit - 4 Flute **\$55.99**

Thank you for shopping with us!

Fiberglass-impregnated materials are well-known for their abrasiveness with a tendency to fray or shred during machining, along with heat created by the router bit. Amana Tool's response to these challenges is an extremely free-cutting, multi-edge tool that shears the material without shredding or producing unnecessary heat. Adding a Zirconium Nitride Ceramic (ZrN) coating increases the edge hardness by nearly 50%, greatly increasing the life of the cutting edge.



#### Benefits of ZrN Coating

- Creates a harder and tougher cutting edge, allows for a prolonged cutting edge life, and helps to prevent the build-up of material in the flutes while cutting
- High resistance to wear
- Extended tool life
- Less friction & heat buildup

**Excellent for cutting:** +Acrylonitrile-Butadiene-Styrene (ABS) +Carbon Fiber Reinforced Polymer (CFRP) +Composite Materials +Coroplast® +Fiberglass +Fiberglass PCB Board +Fiber Reinforced Plastic (FRP) +High Impact Polystyrene (HIPS) +Low Density Polyethylene (LDPE) +Poly (methyl methacrylate) (PMMA) +Polycarbonate (Lexan™)† +Polyethylene Terephthalate Glycol-Modified (PETG / PET-G) +Thermoplastic Polyolefin (TPO)

†Recommendation: Use the slowest suggested feed rates and the shortest bits necessary for cutting and routing Lexan™.

Tools are manufactured with high balance that allows them to run up to 60,000 RPM. Adjust your chipload and feed rate accordingly.

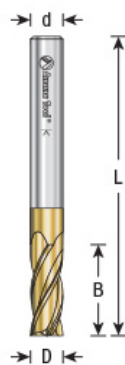

SPECIFICATIONS

## SPECIFICATIONS

<b>Manufacturer</b>	Amana Tool
<b>Diameter</b>	1/4 in
<b>Cut Height, Length, or Width</b>	3/4 in
<b>Flute Geometry</b>	Upcut
<b>Flute</b>	4
<b>Overall Length</b>	2 1/4 in
<b>RPM</b>	High balance allows up to 60,000 RPM
<b>Shank</b>	1/4 in