


## Edge of Arlington Saw & Tool, Inc.

124 South Collins  
 Arlington, TX 76010  
 Phone:817-461-7171 • Fax: 817-795-6651  
 Toll Free: 888-461-7171  
 Email: [info@eoasaw.com](mailto:info@eoasaw.com)  
 Website: [www.eoasaw.com](http://www.eoasaw.com)



### Item #54227, Amana Tool Carbide-Tipped Traditional Raised Panel with Back Cutter 15 Deg x 1-3/8 Angle x 3-3/8 Dia x 1/2 Inch Shank \$198.75

Thank you for shopping with us! Amana Tool Carbide-Tipped Traditional Raised Panel with Back Cutter 15 Deg x 1-3/8 Angle x 3-3/8 Dia x 1/2 Inch Shank Raised panels fit standard panel grooves, even when the panel thickness exceeds 5/8" . As the main cutter raises the front of the panel, the back cutter mills the back to produce a standard-thickness tongue around the panel. Each tool is supplied with two different guide bearings, enabling you to stage cuts on curved edges effectively and safely. All tools have 1/2" shanks. Must be used in a table-mounted 3+ horsepower router and run at reduced speed. Multiple passes recommended. Replacement bearing #47713 (8mm x 16mm) and #47763 (8mm x 1 1/4" )  
**Warning:** Maximum RPM = 12,000

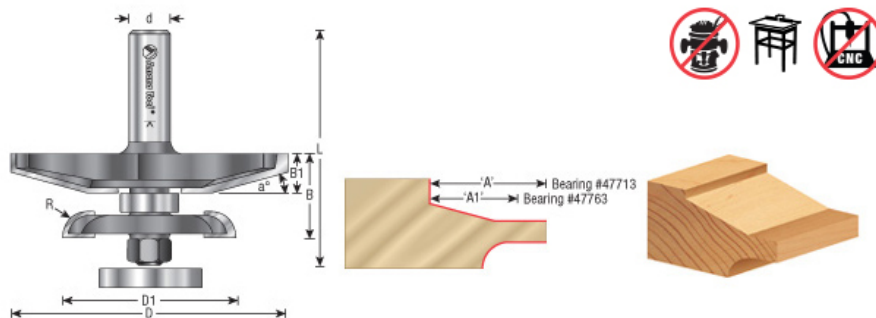

Note: Reveal ('A') reflects the total length of cut. Therefore, you must deduct 3/8" (usually) for allowing the panel to recess into the frame. Note: To receive ('A1') use bearing #47763.

SPECIFICATIONS	
<b>Manufacturer</b>	Amana Tool
<b>Diameter</b>	3 3/8 in
<b>Cut Height, Length, or Width</b>	1 1/16 in
<b>Bearing(s)</b>	47763, Amana Tool 5/16 ID x 1-1/4 OD x .196 Thick Steel Ball Bearing Guide 47713, Amana Tool Metric 8mm ID x 16mm OD x 5mm Thick Steel Ball Bearing Guide
<b>Diameter (D1)</b>	2 1/8 in
<b>Flute</b>	2 w/Bearing
<b>Note</b>	Reveal A reflects the total length of cut. Therefore, you must deduct 3/8 in (usually) to allow the panel to recess into the frame. To Receive 'A1,' use bearing #47713. Bearing is included with tool.
<b>Overall Length</b>	2 15/16 in
<b>Radius</b>	5/16 in
<b>Reveal</b>	1 3/8 in (A)1 1/16\ (A1)

## SPECIFICATIONS

<b>Shank</b>	1/2 in
<b>Type</b>	Traditional
<b>Angle</b>	15 deg
<b>RPM</b>	Max 12,000