

Edge of Arlington Saw & Tool, Inc.

124 South Collins
Arlington, TX 76010
Phone: 817-461-7171 • Fax: 817-795-6651
Toll Free: 888-461-7171
Email: info@eoasaw.com
Website: www.eoasaw.com



Item #LU1I06, Freud® Saw Blades to Cut Solid Wood Frames - LU1I Series **\$140.85**

Thank you for shopping with us!

Silent Saw Blade. Anti-Vibration Design. Suitable for crosscutting. Carbide-Tipped Blade to cut solid wood frames in crosscutting. No splintering of frames and end trims of previously profiled items, where the items have to be coupled to perfectly match, even if they are covered with paint, chalk, and other abrasive and fine materials.


Silver I.C.E. Coating prevents build-up on the blade surface and keeps the blade running cooler and cleaner.

Machines: Single- or double-head miter saws


Features: ATB 20° tooth with positive cutting angle

Material: Softwood and hardwood

Frames: Ultimate

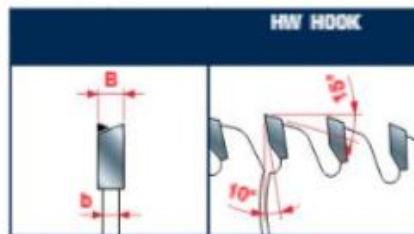

Tooth features - Caratteristiche del dente

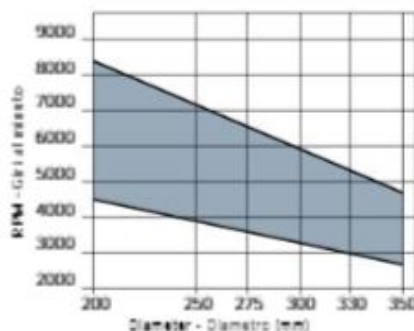

Minimum and maximum RPM based on the blade diameter.
Fascia dei R. giri minimo e massimo consigliati in funzione del diametro della lama.

To peruse more comprehensive information on Freud® Tools Industrial Circular Saws—correct saw blade use, informational tips, technical information—click on the link to [Industrial Saw Blades Catalog](#).

SPECIFICATIONS

Manufacturer	Freud Tools
Diameter	300 mm
Arbor	30 mm
Teeth	96
Pinholes	2/9/46.4 + 2/10/60
Plate	2.5 mm