Edge of Arlington Saw & Tool, Inc.

124 South Collins Arlington, TX 76010

Phone:817-461-7171 • Fax: 817-795-6651

Toll Free: 888-461-7171 Email: <u>info@eoasaw.com</u> Website: www.eoasaw.com



Item #RC-2258, Amana Tool Insert Carbide Spoilboard Surfacing, Rabbeting, Flycutter, Slab Leveler & Surface Planer 4" Dia x 1/2" x 3/4" Shank Router Bit \$356.46

Thank you for shopping with us!

CNC use only.

Designed for planing & rabbeting the following materials:

- -MDF
- -Fiberboard
- -HDF/LDF
- -Balsa Core*
- -Epoxy (Epoxy Resins)*
- -High Density Urethane (HDU Board)*
- -Plastic/Acrylic*
- -Plywood/Chipboard*
- -Hardwood/Softwood*
- -Ultra-High-Molecular-Weight Polyethylene (UHMWPE)*


*For optimal results and maximum insert life, replace inserts with optional general purpose knives #AMA-12 (sold separately).

Featuring:

- 4-sided solid carbide insert knives
- Exclusive carbide grade for highest quality of cut
- Maximum cutting efficiency
- Faster material removal process
- Longest tool life

These industrial router bits feature solid carbide insert knives with four cutting edges that allow users to flip the knife over when one side becomes dull, providing the highest-quality finish available on woodworking tools.

Warning: Proper torques rating to tighten down screws is 2-3Nm Torques.

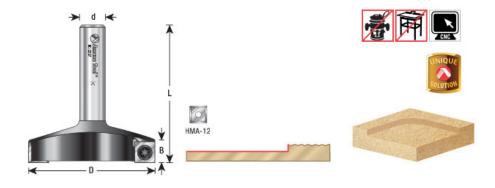

SPECIFICATIONS

Manufacturer

Amana Tool

| SPECIFICATIONS | |
|------------------------------|---|
| Cut Depth | 1/4 in Max Cut Depth |
| Diameter | 4 in |
| Cut Height, Length, or Width | 1/2 in |
| Knives | HMA-12. Optional general purpose knives: AMA-12. Optional Solid Wood: AMA-12-DLC. |
| Overall Length | 3 in |
| RPM | 13,000 |
| Shank | 3/4 in |
| Replacement Parts | Screw #67110 |
| Note | Warning: Proper Torques rating to tighten down screws is 2-3Nm Torques. CNC Use only. |