

Edge of Arlington Saw & Tool, Inc.

124 South Collins

Arlington, TX 76010

Phone: 817-461-7171 • Fax: 817-795-6651

Toll Free: 888-461-7171

Email: info@eoasaw.com


Website: www.eoasaw.com



Amana A.G.E. Series Solid Surface Saw Blades: M-TCG Grind


Thank you for shopping with us!
Excellent for cutting solid surface materials.

Specifically designed for cutting solid surface materials such as Avonite®, Dupont Corian®, Wilsonart®, Gibralter®, Earthstone®, Fountainhead®, Surrell®, Staron®, plastic laminate, Plexiglas®, and other acrylic based materials. The modified triple chip grind is especially configured to leave a swirl-free cut in solid surface materials. Thicker than normal steel plates reduce vibration that degrades the cut and shortens tool life. Suitable for a variety of saw configurations. The hook angle virtually eliminates self-feeding when used on radial arm saws.

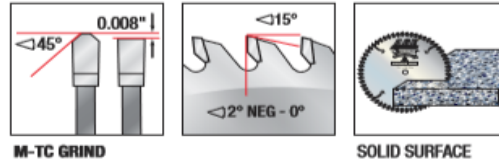

MD160-488: Festool® and other track saw machine compatible

Carbide-tipped Festool and other track saw machine compatible saw blades are available for cutting aluminum, steel, building panels, laminates, melamine, soft plastics, solid surfaces and wood. Specifically designed to be compatible with your Festool machines. Available in 160mm, 210mm and 260mm diameters.



M-TCG GRIND

Item #	Diameter	Bore	Grind	Hook Angle	Kerf	Pinholes	Plate	Teeth	RPM	Fits	Manufacturer	Price
--------	----------	------	-------	------------	------	----------	-------	-------	-----	------	--------------	-------

MD160-488	6 1/4 in (160 mm)	20 mm	M-TCG	-2 deg	0.102 in	--	0.071 in	48	9,500	Fits Festool Machines TS 55 EQ/ATF 55 E/ AP 55	Amana Tool	\$61.91
MD7-408	7 1/4 in	5/8 in	M-TCG	-2 deg	0.104 in	--	0.080 in	40	10,000	--	Amana Tool	\$64.58
MD7-608	7 1/4 in	5/8 in	M-TCG	0 deg	0.118 in	--	0.087 in	60	10,000	--	Amana Tool	\$71.74
MD8-608	8 in	5/8 in	M-TCG	0 deg	0.126 in	--	0.087 in	60	9,500	--	Amana Tool	\$66.23
MD10-728	10 in	5/8 in	M-TCG	0 deg	0.126 in	--	0.087 in	72	7,300	--	Amana Tool	\$92.44
MD10-728-30	10 in	30 mm	M-TCG	0 deg	0.126 in	2/10/60, 2/7/42 & 2/9/46	0.087 in	72	7,300	--	Amana Tool	\$92.44
MD12-848	12 in	1 in	M-TCG	0 deg	0.126 in	--	0.087 in	84	6,200	--	Amana Tool	\$107.63
MD12-848-30	12 in	30 mm	M-TCG	0 deg	0.126 in	2/10/60, 2/7/42 & 2/9/46	0.087 in	84	6,200	--	Amana Tool	\$107.63