Edge of Arlington Saw & Tool, Inc.

124 South Collins Arlington, TX 76010 Phone:817-461-7171 • Fax: 817-795-6651 Toll Free: 888-461-7171 Email: info@eoasaw.com Website: www.eoasaw.com

Soft/Hardwood Crosscul




Soft/Hardwood Ripping

Amana Tool Multi-Use Ripping/General Purpose Saw Blades

Thank you for shopping with us!

This is an excellent and popular general purpose configuration blade. Its low tooth count, high hook angle, and ample gullets make it an aggressive, fast cutting ripping blade. However, its ATB grind allows it to crosscut well. A good choice for all-around use. Warning: Before use, read saw blade safety guidelines in <u>Amana's catalog</u>.

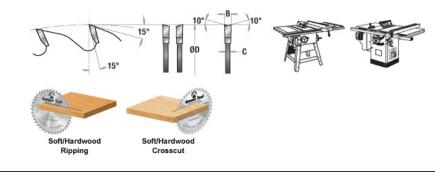

Item #	Manufacturer	Diameter	Bore	Grind	Kerf	Note	Pinholes	Plate	Teeth	Hook Angle	Price
610300	Amana Tool	10 in (250 mm)	5/8 in	ATB	0.126 in			.087 in	30	15 deg	\$93.30
610300-30	Amana Tool	10 in (250 mm)	30 mm	ATB	0.126 in	P.H. = pin-hole configuration. Example: 2/10/60 = 2 @ 10mm dia on 60mm circle.	2/7/42 & 2/10/60	.087 in	30	15 deg	\$93.30
612360	Amana Tool	12 in (300 mm)	1 in	ATB	0.126 in			.087 in	36	15 deg	\$122.36

612360-30	Amana Tool	12 in (300 mm)	30 mm	ATB	0.126 in	P.H. = pin-hole configuration. Example: 2/10/60 = 2 @ 10mm dia on 60mm circle.	2/7/42 & 2/10/60	.087 in 36	15 deg	\$122.36
614420	Amana Tool	14 in (350 mm)	1 in	ATB	0.137 in			.098 in 42	15 deg	\$139.58
614420-30	Amana Tool	14 in (350 mm)	30 mm	ATB	0.137 in	P.H. = pin-hole configuration. Example: 2/10/60 = 2 @ 10mm dia on 60mm circle.	2/7/42 & 2/10/60	.098 in 42	15 deg	\$139.58
616480	Amana Tool	16 in (400 mm)	1 in	ATB	0.137 in			.098 in 48	15 deg	\$165.23
616480-30	Amana Tool	16 in (400 mm)	30 mm	ATB	0.137 in	P.H. = pin-hole configuration. Example: 2/10/60 = 2 @ 10mm dia on 60mm circle.	2/7/42 & 2/10/60	.098 in 48	15 deg	\$165.23
618540	Amana Tool	18 in (450 mm)	1 in	ATB	0.15 in			.110 in 54	15 deg	\$223.99
620600	Amana Tool	20 in (500 mm)	1 in	ATB	0.173 in			.110 in 60	15 deg	\$239.21