

Edge of Arlington Saw & Tool, Inc.

124 South Collins
Arlington, TX 76010
Phone: 817-461-7171 • Fax: 817-795-6651
Toll Free: 888-461-7171
Email: info@eoasaw.com
Website: www.eoasaw.com





99-277

Item #99-277, Freud Entry & Interior Door Router Bit System 2-Piece for 2" & 2 1/4" Stock - Beading \$320.37

Thank you for shopping with us! Application: Build entry and interior doors with true mortise and tenon construction for rock-solid joints that last a lifetime. -This entry and interior door system lets the woodworker build doors with true mortise and tenon construction for rock-solid joints that last a lifetime. -This matched rail and stile bit set comes fully assembled to mill perfect 1 3/4" rail and stile joints for exterior doors. To mill 1 3/8" interior door joints, simply remove the spacers from each bit. -Milling a tenon of virtually any length is easy: the top cutter and bearing of the rail bit is simply unscrewed from the lower cutter and shank without removing the bit from the router or changing the height of the cutter! -Cuts all composition materials, plywoods, hardwoods, and softwoods. -Use on table-mounted portable routers. [Entry & Interior Door Bit Reference Guide](#)

Steps To Create Rail & Stile Joints With Extended Tenons:

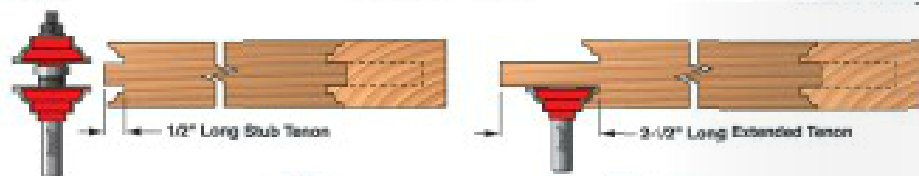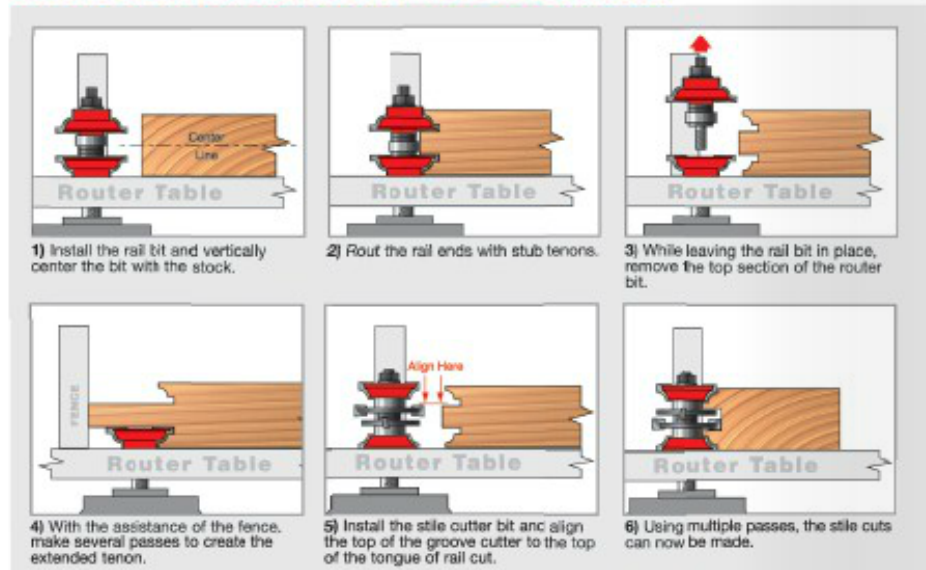

Freud's innovative feature enables the top section of the rail bit to be removed allowing you to cut an extended tenon out in the rail. By making matching mortises in the mating stiles, a strong mortise & tenon joint will be created, which is required for making entry and interior door joints.



SPECIFICATIONS

SPECIFICATIONS

Manufacturer	Freud Tools
Diameter	1 7/8 in
Cut Height, Length, or Width	2 3/8 in
Overall Length	4 19/32 in
Profile	Beading
Shank	1/2 in
Style	2-pc entry & interior door bit set for 2 in & 2 1/4 in thick stock