

**Edge of Arlington Saw & Tool, Inc.**

124 South Collins  
 Arlington, TX 76010  
 Phone:817-461-7171 • Fax: 817-795-6651  
 Toll Free: 888-461-7171  
 Email: [info@eoasaw.com](mailto:info@eoasaw.com)  
 Website: [www.eoasaw.com](http://www.eoasaw.com)



**Item #MD12-963-30, Amana A.G.E. Series Double-Sided Melamine Saw Blades: H-ATB Grind \$124.13**


Thank you for shopping with us!

**Smooth, clean cuts in double-sided melamine.**

Designed for cutting double-sided melamine and veneered sheet goods on saws without a scoring unit. The H-ATB tooth geometry slices clearly through fragile coatings and laminates. The high bevel will not "violate" the bottom laminate upon exiting the cut, which causes "blow-out." Extra hard sub-micrograin carbide tips for long life.

**Warning:** Not recommended for cutting non-ferrous alloys.

	NOT RECOMMENDED	FAIR	GOOD	EXCELLENT
MELAMINE	[Yellow bar spanning all categories]			
LAMINATE	[Yellow bar spanning all categories]			
CROSSCUT	[Yellow bar spanning FAIR, GOOD, EXCELLENT]			
PLYWOOD	[Yellow bar spanning FAIR, GOOD, EXCELLENT]			
CHIPBOARD	[Yellow bar spanning FAIR, GOOD, EXCELLENT]			
RIPPING	[Yellow bar spanning FAIR, GOOD, EXCELLENT]			
NON-FERROUS ALLOYS	[Yellow bar with a red 'X' in the NOT RECOMMENDED column]			

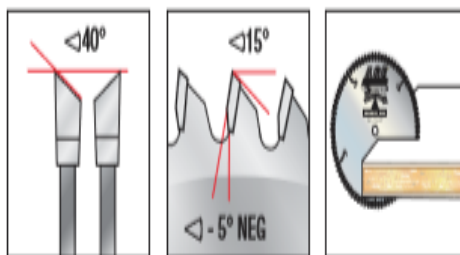

**H-ATB GRIND**  
 HIGH OR ACUTE ANGLE ALTERNATE  
 TOP BEVEL.

**MELAMINE SINGLE &  
 DOUBLE SIDED**

## SPECIFICATIONS

<b>Manufacturer</b>	Amana Tool
<b>Diameter</b>	12 in
<b>Bore</b>	30 mm
<b>Grind</b>	H-ATB
<b>Kerf</b>	0.126 in
<b>Hook Angle</b>	-5 deg
<b>Note</b>	--
<b>Pinholes</b>	2/10/60, 2/7/42 & 2/9/46
<b>Plate</b>	0.100 in
<b>RPM</b>	6,200
<b>Teeth</b>	96